

OCXO (Oven Controlled Crystal Oscillators) OC11T12A; OC11T12S Series

+12.0 V
HCMOS Square Wave



MERCURY
Since 1973

Mercury OC11T is 25.4x25.4 mm (1 inch square) 5 pin solder sealed metal package with 19.0x19.0 mm pin-to-pin spacing high stability low aging OCXO. Besides standard AT cut crystal, users can also choose SC cut crystal for better performance. 50 ohm load sine wave output is available as OC11E series..



General Specifications

Output Wave Form		HCMOS square wave. Wave form code is “T”					
Frequency Range		1.0 MHz ~100.0 MHz					
Type of Crystal Cut Used		AT-cut. Use “A” for crystal code or SC-cut: use “S” for crystal code. Please refer to technical note TN031 for SC and AT-cut crystal comparison					
Supply Voltage (Vcc)		+12.0 V _{D.C} ±5% (voltage code is “12”)					
Initial Calibration Tolerance		±0.05 ppm max. at time of shipment; Vcon= +2.5V, at +25°C					
Frequency Stability vs	Operating Temperature Range (custom spec. on request)	AT-cut crystal			SC-cut crystal		
		±0.03 ppm over -20°C to +70°C			±0.01 ppm over -20°C to +70°C		
		±0.05 ppm over -20°C to +70°C			±0.03 ppm over -20°C to +70°C		
		±0.1 ppm over -20°C to +70°C			±0.05 ppm over -20°C to +70°C		
	Aging	±0.05 ppm over -40°C to +85°C			±0.03 ppm over -40°C to +85°C		
		±0.1 ppm over -40°C to +85°C			±0.05 ppm over -40°C to +85°C		
		±0.5 ppm over -40°C to +85°C			±0.1 ppm over -40°C to +85°C		
	Supply Voltage ±5% Variation	AT-cut: ±0.1 ppm typical first year. SC-cut: ±0.05 ppm typical first year.					
Load ±5% variation	±20 ppb max.						
Warm-up time (at +25°C)	±20 ppb max.						
Voltage Control on pin 1 (EFC) (Electronics Frequency Tuning)	Freq. Deviation Range	AT: ±5 ppm typical SC: ±0.7 ppm typical					
	Control Voltage Range	0.5 V to 4.5 V					
	Transfer Function	Positive: Increasing control voltage increases output frequency.					
	Input Impedance	100 K Ω min.	EFC Linearity		±10% max.		
Power	Power Dissipation (at +25°C)	Warm-up: 250 mA max. Steady-state: 120 mA max.					
Output	Load (Fan out)	15 pF HCMOS max.	Duty Cycle (measured at 50%Vcc)		50% ± 10%		
	Output Voltage Logic High (V _{OH})	+4.5 V typical					
	Output Voltage Logic Low (V _{OL})	+0.5 V typical					
	Rise and Fall Time	5 nS max. (measured at 20% ÷ 80% of waveform)					
	Reference Voltage Output	+4.0 V _{D.C} ±0.3 V _{D.C} . or custom.					
	Phase Noise	Offset	10 Hz	100 Hz	1 KHz	10 KHz	
		10 MHz AT-cut XTAL	-110 dBc typ.	-135 dBc typ.	-150 dBc typ.	-155 dBc typ.	
Storage Temperature		-40°C to +105°C					
Shock		2000 G's, 0.3 ms ½ sine					
Vibration		10 to 2000 Hz / 10 G's					

MERCURY www.mercury-crystal.com

Taiwan: TEL (886)-2-2406-2779, FAX (886)-2-2496-0769, e-mail: sales-tw@mercury-crystal.com
U.S.A.: TEL (1)-909-466-0427, FAX (1)-909-466-0762, e-mail: sales-us@mercury-crystal.com


OCXO (Oven Controlled Crystal Oscillators) OC11T12A; OC11T12S Series

+12.0 V
HCMOS Square Wave



MERCURY
Since 1973

OC11T Test Circuit

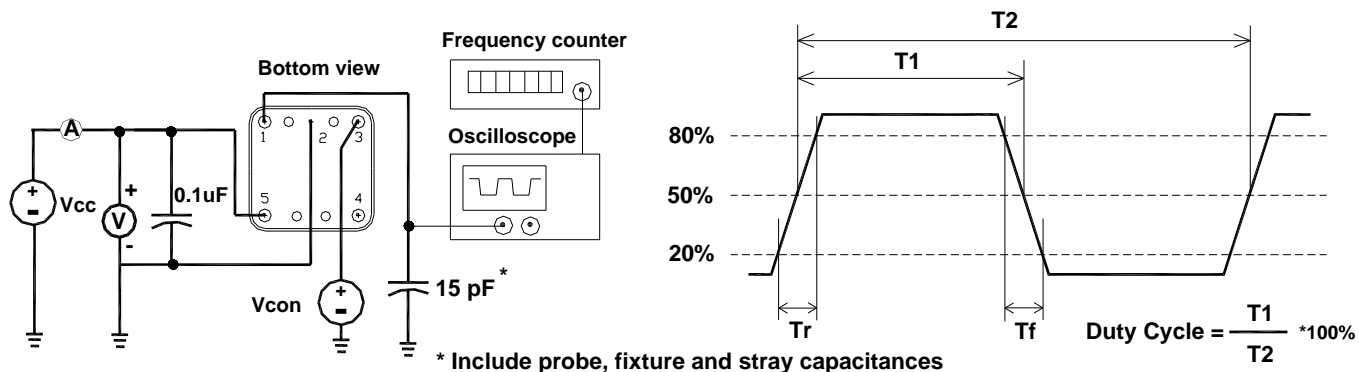

OC11T Series Package Dimensions and Pin Connections:

unit mm


Pin 1: RF Output

Pin 2: Ground / Case

Pin 3: Voltage Control (EFC)

Pin 4: Reference Voltage Output

Pin 5: Supply Voltage Input

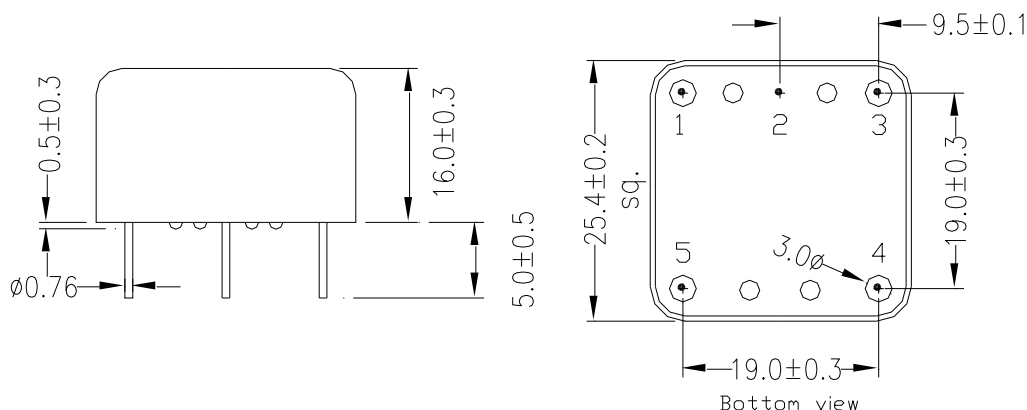

Part Number Format and Example:

Example: OC11T12A-10.000-0.1/-20+70

OC11T12	A	—	10.000	—	0.1	/	-20+70
①	②	dash	③	Dash	④	slash	⑤
<p>①: OC11T12: OC11 series; "T" for CMOS Square wave; "12" for +12.0 V supply voltage ②: Crystal type. "A" for AT-cut crystal; "S" for SC-cut crystal ③: Frequency in MHz ④: Frequency stability in ppm ⑤: Operating temperature range in Celsius</p>							