

OCXO (Oven Controlled Crystal Oscillators) OC149T3A, OC149T3S Series

+3.3 V
Square Wave



MERCURY
Since 1973

Features:

- Full size 4 pin DIP full metal package
- +3.3 V D.C supply Voltage
- 15 pF load CMOS square wave output
- Choice of AT-cut or SC-cut crystal
- Voltage control (Electronic Frequency Tuning) on pin 1



General Specifications:

Output Wave From			Square wave. Wave form code is "T"		
Frequency Range			AT-cut crystal: 8.0 MHz ~125.0 MHz SC-cut crystal: 10.0 MHz ~ 100.0 MHz		
Type of Crystal Cut Used			AT-cut. Use "A" for crystal code. SC-cut. Use "S" for crystal code Please refer to technical note TN031 for SC and AT-cut crystal comparison		
Supply Voltage (V _{DD})			+3.3 V (voltage code is "3")		
Initial Calibration Tolerance			AT-cut: ±0.5 ppm max. at the time of shipment. @+25°C, Vcon= +1.65 V SC-cut: ±0.05 ppm max. at the time of shipment. @+25°C, Vcon= +1.65 V		
Frequency Stability vs	Operating Temperature Range (custom spec. on request)		AT-cut crystal		SC-cut crystal
			±0.05 ppm over -20°C to +70°C		±0.02 ppm over -20°C to +70°C
			±0.1 ppm over -20°C to +70°C		
			±0.3 ppm over -20°C to +70°C		
	Long Term Aging		±0.1 ppm over -40°C to +85°C		±0.05 ppm over -40°C to +85°C
			±0.5 ppm over -40°C to +85°C		
			±1.0 ppm over -40°C to +85°C		
Supply Voltage ±5% Variation		AT-cut: ±30 ppb typical ; SC-cut: ±20 ppb typical			
Load ±5% variation		AT-cut: ±30 ppb typical ; SC-cut: ±20 ppb typical			
Voltage Control on pin 1		Electronic Frequency Control (EFC at pin 1)		AT-cut: ±5.0 ppm typical; SC-cut: ±1.0 ppm typical	
		Control Voltage Range		0.3 V to 3.0 V	
		Transfer Function		Positive: Increasing control voltage increases output frequency	
		Input Impedance		100 K Ω min.	
		EFC Linearity		±10% max.	
Power	Power Dissipation		Steady-state: 250 mA max. at +25°C.		
			Warm-up: 650 mA max.		
Warm-up time (at +25°C)		AT-cut: 3 minutes max. Within ±0.1 ppm of the unit output frequency. SC-cut: 2 minutes max. Within ±0.1 ppm of the unit output frequency.			
Output	Output Wave Form		LVCMOS Square Wave		
	Output Load		15 pF typical		
	Output Logic HIGH (VOH)		3.0 V typical		
	Output Logic LOW (VOL)		0.3 V typical		

MERCURY www.mercury-crystal.com

Taiwan: TEL (886)-2-2406-2779, FAX (886)-2-2496-0769, e-mail: sales-tw@mercury-crystal.com

U.S.A.: TEL (1)-909-466-0427, FAX (1)-909-466-0762, e-mail: sales-us@mercury-crystal.com

“ O C X O ”

Oven Controlled Crystal Oscillators



Wave Form: TTL / CMOS Square Wave



MERCURY
Since 1973

	Rise and Fall Time		6 n. sec. max.			
	Duty Cycle (Symmetry)		40 % min; 60% max.			
	Phase Noise	Offset	10 Hz	100 Hz	1 KHz	10 KHz
		10 MHz AT-cut Crystal	-80 dBc typ.	-120 dBc typ.	-145 dBc typ.	-150 dBc typ.
Storage Temperature			-40°C to +85°C			
Shock			2000 G's, 0.3 ms ½ Square			
Vibration			10 to 2000 Hz / 10 G's			


OC149T3 Test Circuit:

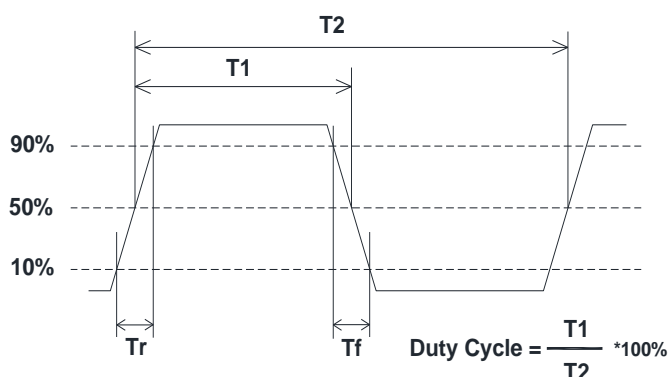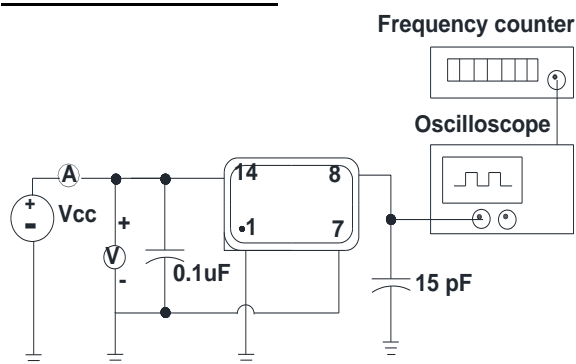

OC149T3 Package Dimensions and Pin Connections:

Pin 1: Voltage Control Pin 7: Ground / Case
Pin 8: Output Pin 14: Supply Voltage

unit mm [inches]
Square corner is pin No. 1

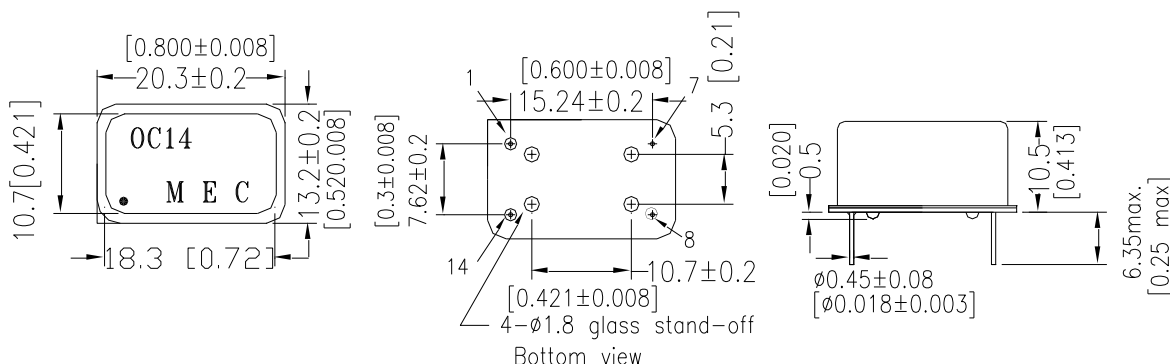

Part Number Format and Example:

Example: OC149T3A-10.000-0.1/-20+70

OC149T3	A	—	10.000	—	0.1	/	-20+70
①	②	dash	③	Dash	④	slash	⑤
<p>①: OC149T3: OC149 series; “T” for CMOS Square wave; “3” for +3.3 V supply voltage</p> <p>②: Crystal type. “A” for AT-cut crystal; “S” for SC-cut crystal ③: Frequency in MHz</p> <p>④: Frequency stability in ppm ⑤: Operating temperature range in Celsius</p>							